

## Circular Counter


Item.no IS-FT03

**Complete with:**  
4 posts, 1 top shelf,  
1 bottom shelf, 4 feet

**Extra:**  
1 middle shelf, Item IS-FS03




## Graphic production

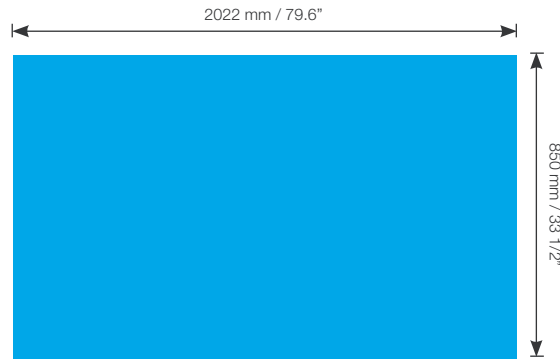

## Graphic panel attachments

### Accessories

**Magnetic tape** (not incl.)  
12 mm/0.5" A tape, 30 m / 98 ft. DM-013-AC  
Each panel needs 6 m/20 ft. (in the midi size)



### Printer material

We recommend the following material:

**Poster paper:** 180 gr / 0.4 lb.  
*The printed graphic panels must be laminated before use.*  
Front side: 125 microns (0,125 mm) / 0.005" "deep crystal"  
Reverse side: 250 microns (0,250 mm) /0.010" "stop light"

**Polyester film:** 330-370 microns (0,350 mm) / 0.013-0.015"  
Top laminate: 125 microns (0,125 mm) / 0.005" "deep crystal"

### Mounting of Magnetic Tape

Magnetic tape to be fixed vertically along each side of the graphic panels.  
**IMPORTANT** Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

### Application Techniques

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.

